

Технический паспорт изделия : HSELDA40WP

Розетка FTTH, настен., Ш80xВ28xГ80 мм, пустая, для 4 волокон

RAL9010 чисто-белый, подходит для установки на DIN-рейку



SCHRACK-Info

FTTH empty outlets serve as a universal interface for fiber optic installations.

They offer a high degree of flexibility when it comes to equipping and adapting the network infrastructure.

Empty outlets are an ideal solution for organizing the fiber-optic connection efficiently and ensuring a clean, well-structured installation—especially when planning for future expansions or upgrades of the network structure.

Features

- Fiber Optic In-House-Cabling
- Offers connection options for up to 4 end devices
- The box is suitable for pre-assembled cables or for pigtails

- Flexible cable entry options
- Lid locks into place
- 2 screws, 2 dowels, and 2 shrink splice protectors included

Optional Accessories

Couplers:

- HSELSK09MR
- HSELSK09GR

Pigtails:

- HLP09M041P
- HLP09D041P

Safety information:

Avoid direct contact with light sources:

- Fiber optic cables—especially those with active light sources such as lasers (e.g., in optical communication systems)—can emit hazardous radiation that may damage the eyes.
- Never look directly into the light of a fiber optic cable, even if the light source is invisible to the naked eye.

Wear protective eyewear:

- When working with fiber optic cables, especially during tests or when using lasers, always wear safety glasses to protect your eyes from harmful radiation.

Handle cables correctly:

- Plug in and unplug cables only by holding the connector, and never pull directly on the cable.

Do not bend or crush:

- Fiber optic cables are sensitive to mechanical stress.

Protect from damage:

- Install cables in dedicated conduits or use protective materials to prevent physical damage.

Keep connectors clean:

- Fiber optic connectors must be free of dust and dirt.
- Even small particles on the connectors can significantly reduce signal quality.

Observe temperature limits:

- Do not expose cables to extremely high or low temperatures.
- Follow the manufacturer's specifications for the cable's maximum operating temperature.

Inspect regularly:

- Frequently check cables for visible damage such as cracks, bends, or signs of wear.
- Damaged cables must be replaced immediately.

Технические данные

Ширина нетто (мм)	80,00
Высота нетто (мм)	28,00
Вес нетто (кг)	0,05
Цвет	RAL 9010 (чисто белый)
мин. температура окружающей среды (°C)	-40
макс. температура окружающей среды (°C)	75

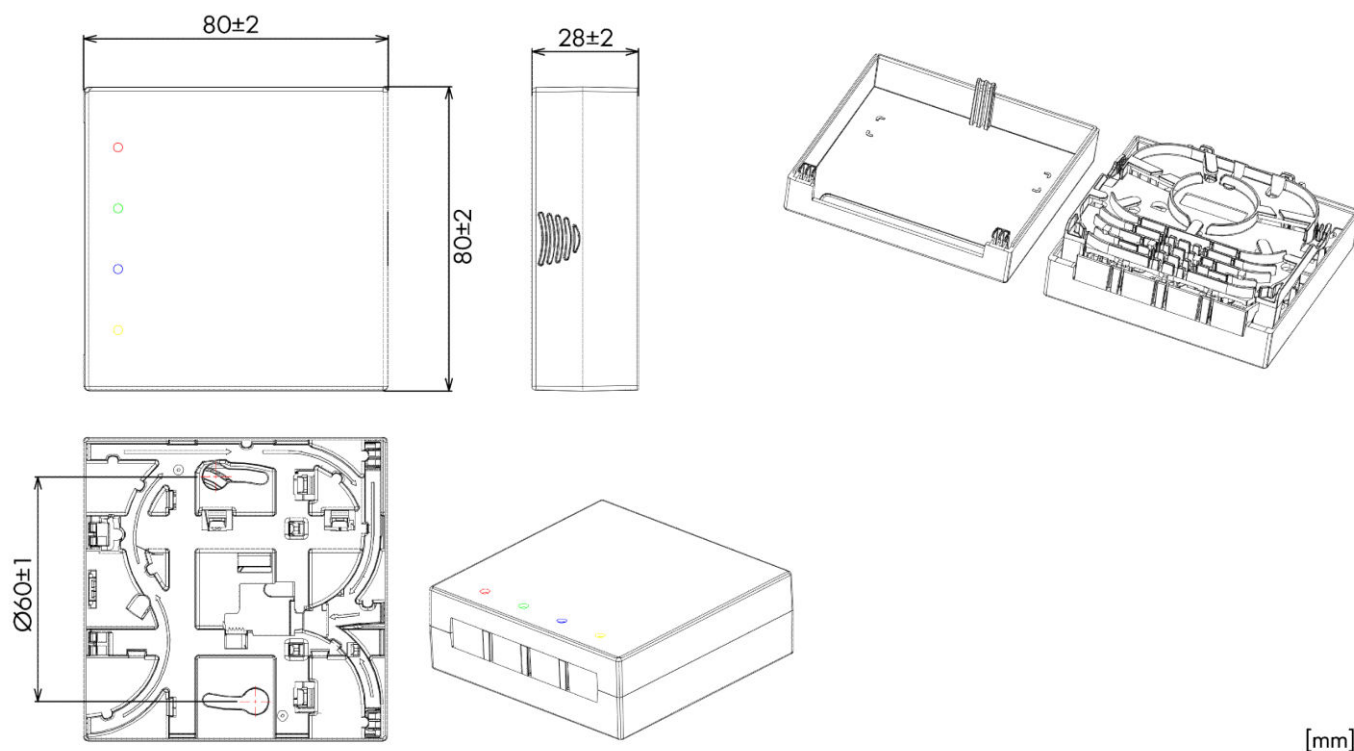
Габаритные чертежи: Розетка FTTH, настен., Ш80хВ28хГ80 мм, пустая, для 4 волокон

Таблица артикулов

ОПИСАНИЕ	Номер заказа
Розетка FTTH, настен., Ш80хВ28хГ80 мм, пустая, для 4 волокон RAL9010 чисто-белый, подходит для установки на DIN-рейку	HSELDA40WP
опциональные принадлежности	
Оптовол.адаптер FTTH LC/APC-дуплексный, пластик, OS2, керам без фланца, зеленый, пылезащитная крышка-заслонка, CLASSIC	HSELSK09MR
Оптовол.адаптер FTTH SC/APC-симплексный, пластик, OS2, керам без фланца, зеленый, пылезащитная крышка-заслонка, CLASSIC	HSELSK09GR
Оптов.пигтейл FTTH LC/APC 8°, 9/125мкм OS2 G657.A2, 1,0м, 4шт. Легкоъемная оболочка Easy Strip, цвет согласно IEC 60304, CLASSIC	HLP09M041P
Оптов.пигтейл FTTH SC/APC 8°, 9/125мкм OS2 G657.A2, 1,0м, 4шт. Легкоъемная оболочка Easy Strip, цвет согласно IEC 60304, CLASSIC	HLP09D041P
Инструмент для очистки оптических коннекторов LC и MU Подходит для разъемов UPC и APC. Более 1000 циклов очистки.	HSELSZT001
Инструмент для очистки оптич. коннекторов SC, ST, FC и E2000 Подходит для разъемов UPC и APC. Более 1000 циклов очистки.	HSELSZT002
Оптич.измер.мощ. с встроен.лазер. источ. видим.света (VFL) и Тестирование медного кабеля RJ45. ВНИМАНИЕ: Это изделие относится к лазерным приборам 2 класса. Не смотреть непосредственно в лазерный луч. Всегда держите порт VFL закрытым, если он не используется. При работе с волоконно-оптическими системами рекомендуется использовать защитные очки для работы с лазером.	HSELSZT003