


Технический паспорт изделия : IL198239-A

Metering insert 2-39E compl. 2 cou. pl. front pl. st. STMK

Frontblende Stahlblech

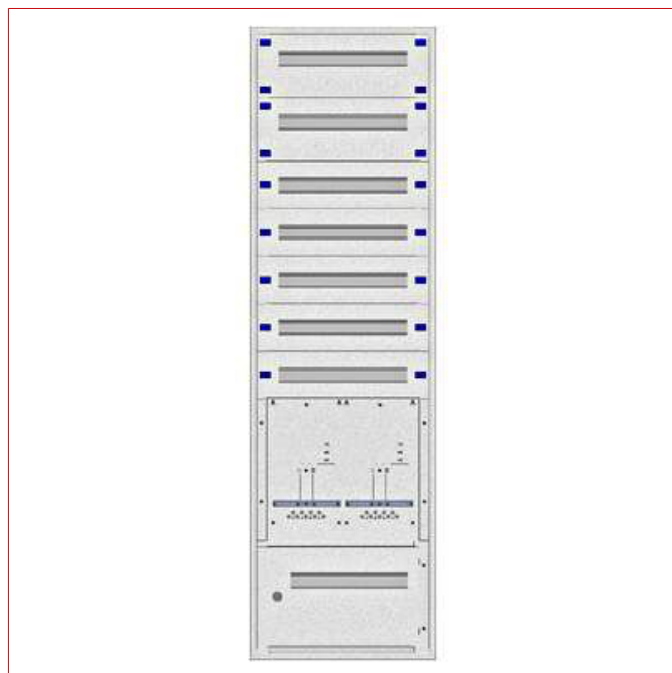

Технические данные

Ширина нетто (мм)	500,00
Высота нетто (мм)	1.795,00
Глубина нетто (мм)	102,00
EAN-код	9004840967296
Тип	Распределительное устройство для счетного прибора, монтаж впотай
Федеральная земля	Штирия
Вставные компоненты	Пластик для передней панели
Цвет	RAL 7035
Ширина счетчика	2
МЕ (1 единица 44,45 мм)	39
Ряды счетчиков	1
Места расположения счетчиков	2
Ряды после счетчиков	7
Лицевая панель	Листовая сталь
Основное описание	Вставка
Ширина модуля	147

Таблица артикулов

ОПИСАНИЕ	ВЕС МЕДИ (кг/км)	Номер заказа
Metering insert 2-39E compl. 2 cou. pl. front pl. st. STMK Frontblende Stahlblech		IL198239-A
опциональные принадлежности		
Комплект заземления 300mm/ Yf 6mm ²		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824