

Технический паспорт изделия : DTS478010-

Серверный шкаф. Отдельно стоящий, 19", W800 H2176 D1000

19" 47U, IP20 черный RAL9005, Нагрузка 1000кг



Информация SCHRACK

Server cabinets are mainly used in data centers and server rooms where an increased load is required and heavy installations such as servers, UPS, etc., have to be installed.

The maximum load is 1000kg.

Front door: Perforated (70%) metal door arched.

Rear door: Perforated (70%), split metal door arched.

The side panels of the server cabinet can be removed and allows easy access to all installations from all sides.

The server cabinet is cooled both actively and passively.

The cooling works passively via perforated doors and actively via roof fans.

The 19" server cabinet from Schrack Technique ensures a high level of flexibility in cable entry due to the prepared opening option in the upper area.

TECHNICAL DATA


- Colour: RAL9005 black
- The opening angle of the front door is up to 230°C
- Height: 47U
- Width: 800mm
- Depth: 1000mm
- Degree of protection: IP20
- Maximum load: 1000kg
- Doors: Rear doors are in standard 70% perforated, double door with 3 point locking system. Front door monoblock 70% perforated, arched metal door with 4 point locking system and swing handle lock, RAL9005 black.

- The side panels are lockable and removable with a cylinder lock
- Fan: Installation is from the roof, no interference with installed equipment or cables inside the cabinet.
- Cable entry option: In the top cover with sliding rubber edge.
- Structure of the enclosure: 19" rails are bent 4-times for reasons of strength. 2.0mm thickness ensure high resilience. The 19" rails are made of steel with an 8 – 12 micron zinc coating for corrossions resistance.




Технические данные


Ширина нетто (мм)	800,00
Высота нетто (мм)	2.176,00
Глубина нетто (мм)	1.000,00
Вес нетто (кг)	144,00
EAN-код	9004840895414
мин. температура окружающей среды (°C)	5
макс. температура окружающей среды (°C)	40
МЕ (1 единица 44,45 мм)	47
Степень защиты	IP20

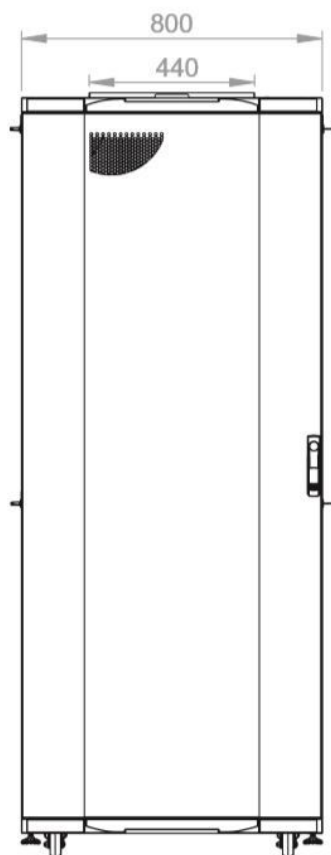**Габаритные чертежи: Серверный шкаф. Отдельно стоящий, 19", W800
H2176 D 1000**

Front view

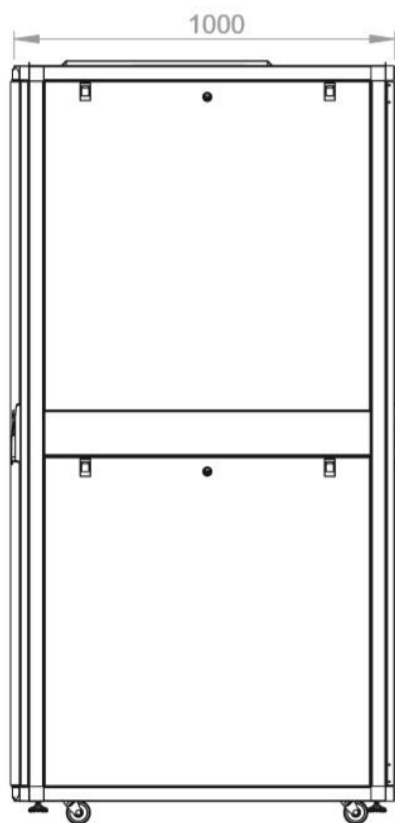


Side view

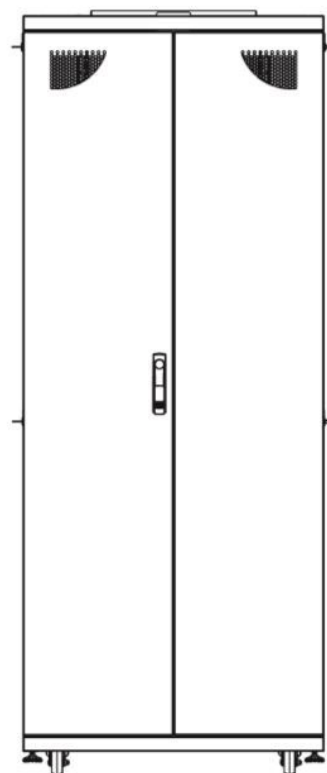


Rear view


**Габаритные чертежи: Серверный шкаф. Отдельно стоящий, 19", W800
H2176 D1000**

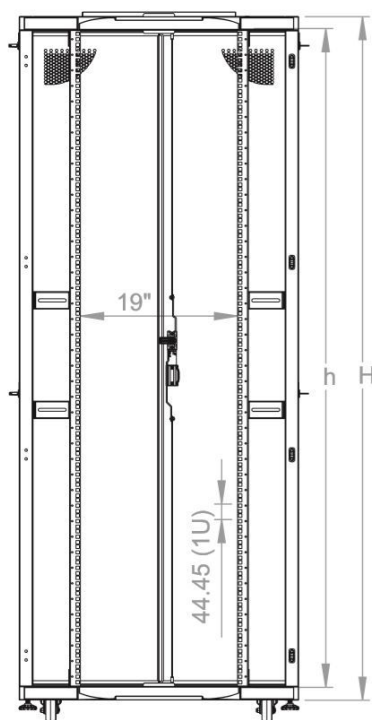

Front inside view

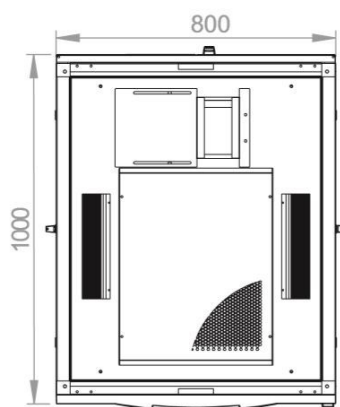


Top view

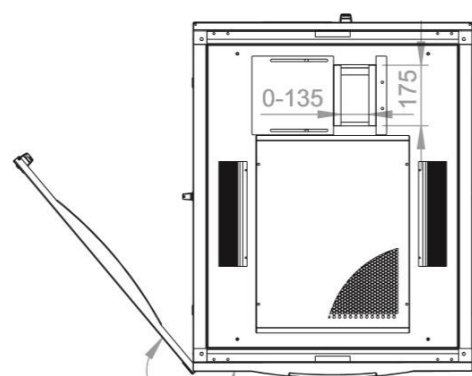


0°-230° Front door
opening angle

**Габаритные чертежи: Серверный шкаф. Отдельно стоящий, 19", W800
H2176 D1000**

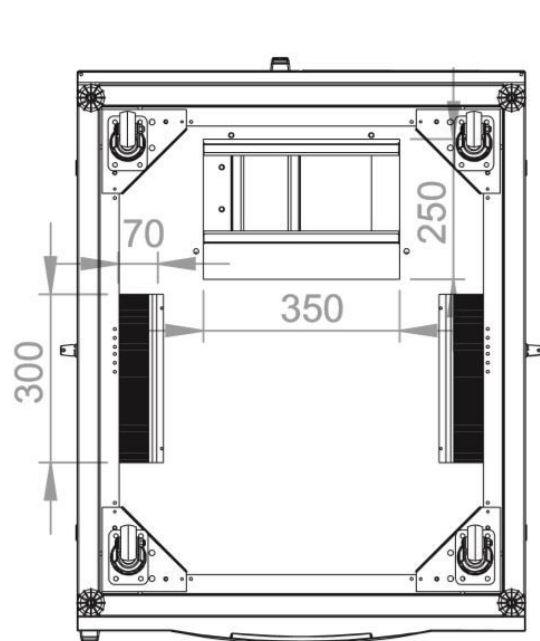


Bottom view

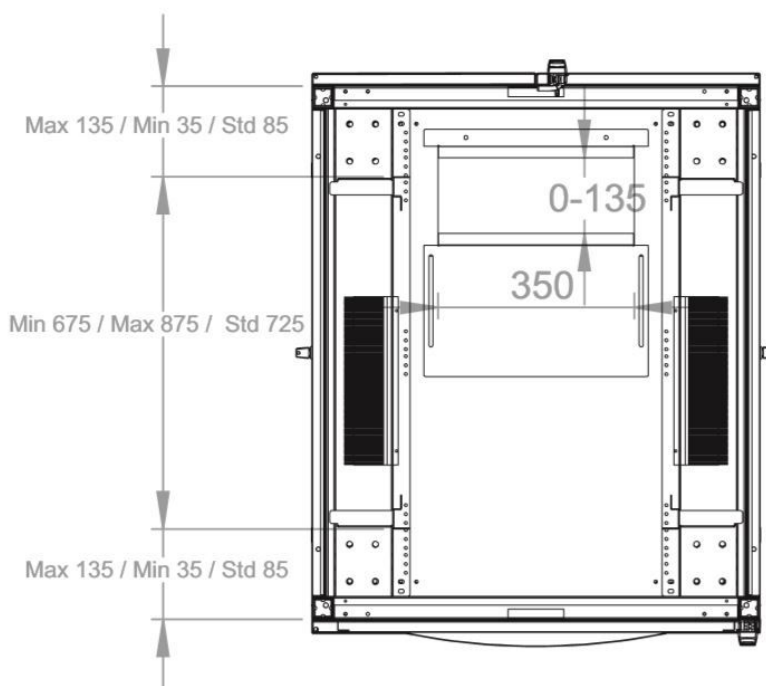

Max/Std/Min
Equipment mounting Distance

Габаритные чертежи: Серверный шкаф. Отдельно стоящий, 19", W800 H2176 D1000

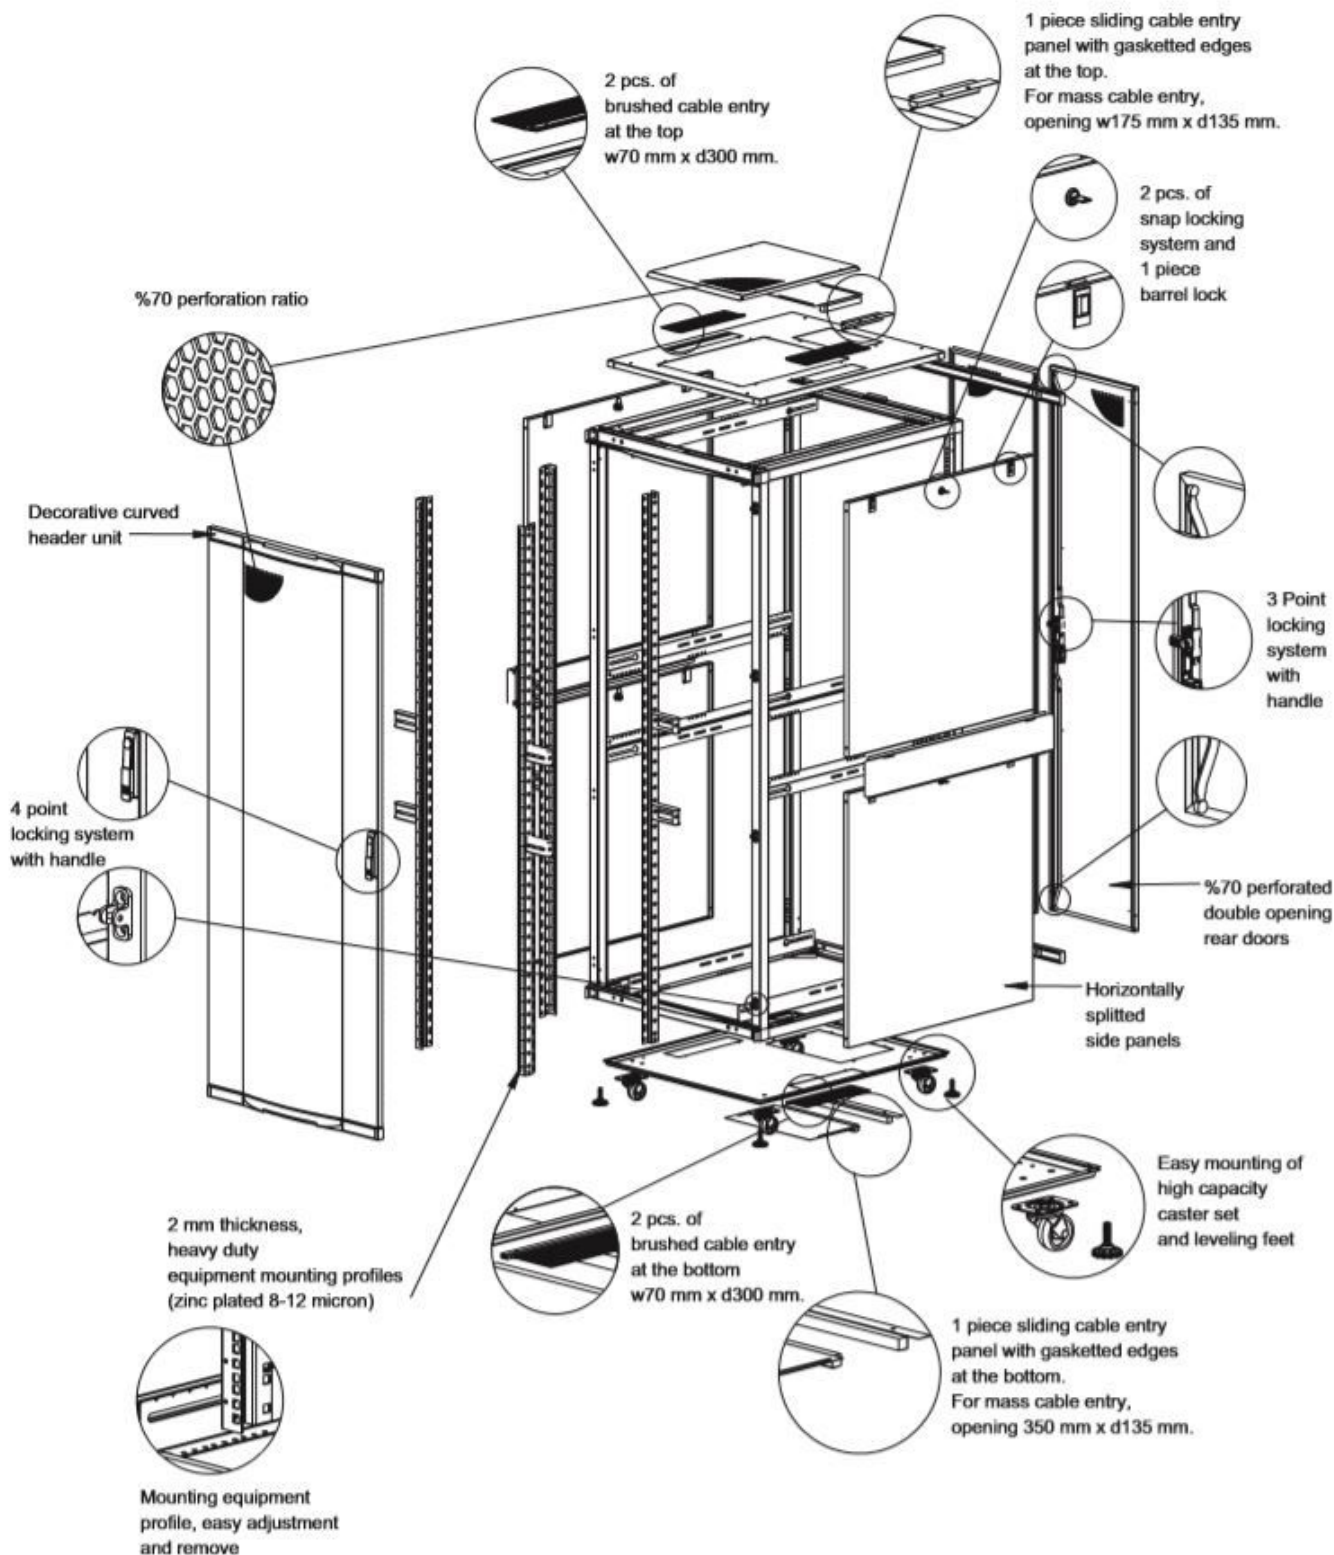

ОПИСАНИЕ

Номер заказа

Серверный шкаф. Отдельно стоящий, 19", W800 H2176 D1000
19" 47U, IP20 черный RAL9005, Нагрузка 1000кг

DTS478010