

Технический паспорт изделия : DTWH156045

Сетевой шкаф настенный S-RACK, Ш=600 В=779 Г=450, 19", 15U

RAL9005 черный, рейки 19", 2 вперед



SCHRACK-Info

Mainly used in offices and office-like environments, such as flats, single-family homes, etc. Suitable as a central distributor in small to medium-sized network installations, but also for use as a floor distributor (sub-distributor) in the horizontal area of structured cabling. The removable side panels allow convenient access to the installed components, even afterwards. For active cooling of the built-in components, optional DTLT fan units with one or two fans can be mounted in the roof


- **Material:** Powder-coated steel sheet housing
- **Material thickness:**
 - Top and bottom chassis: 0.6mm
 - Corner profile: 1.1mm
 - Rails: 1.4mm
 - Front door: 0,6mm
 - Rear panel: 0.5mm
 - Side panel: 0.5mm
- **Colors:**
 - RAL9005 Black
 - Strips: RAL5005 Signal blue
- **Height:** 15U
- **Width:** 600mm
- **Depth:** 450mm

- **Maximum load:** With even distribution: 80kg
- **Degree of protection:** IP20
- **Doors:** Glass door of safety glass 4mm including lock and 2 keys. Door hinged on the right. Conversion to left hinged possible. Opening angle of the door: approx. 230°.
- **Side panels:** Removable and lockable. The side panels are also fitted with a plastic dummy at the locking point of the barrel in the center. Optional accessory kit with 2 cylinders (O-shape/quarter-turn with cam lock) can be installed to provide more security.
- **Rails:** D= 450mm have 2x front 19" rails, galvanised, depth-adjustable, U marking present. A second pair of 19" DTWGPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy installations.
- **Cable entry options:** In roof, floor and rear wall.
 - The floor, roof and rear panel are provided with a break-out blank cover.
- **Cooling:**
 - Passive cooling through ventilation slots and heat exchange with the outside area.
 - Active cooling by optional DTLT fans, which are easily and quickly inserted into the roof from the outside. This can also be easily done out afterwards.
- **Earthing:** Earthing set is included
- **Accessories:** Numerous accessories available (shelves, PDUs, cable management, blank panels, fan units, etc.)
- **Delivery:** Enclosure is completely assembled and delivered with assembly material


Технические данные

Ширина нетто (мм)	600,00
Высота нетто (мм)	779,00
Глубина нетто (мм)	450,00
Вес нетто (кг)	18,00
EAN-код	9004840990973
мин. температура окружающей среды (°C)	5
макс. температура окружающей среды (°C)	40
ME (1 единица 44,45 мм)	15
Цвет	RAL 9005 (черный)
Степень защиты	IP20
Максимальная нагрузка (кг)	80
Серия	S-RACK


**Габаритные чертежи: Сетевой шкаф настенный S-RACK, Ш=600 В=779
Г=450, 19", 15U**

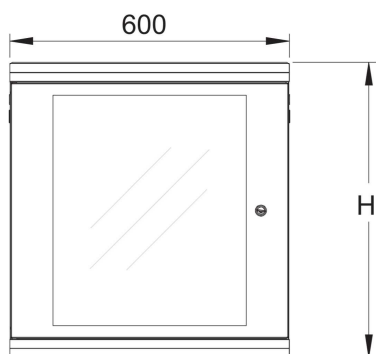


Front view

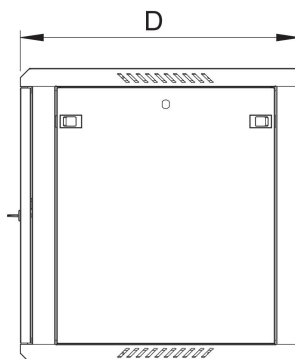


Side view




Bottom view




Top view

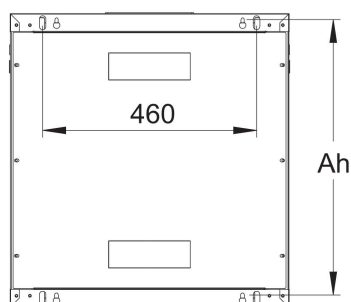


Rear view



Front inside view



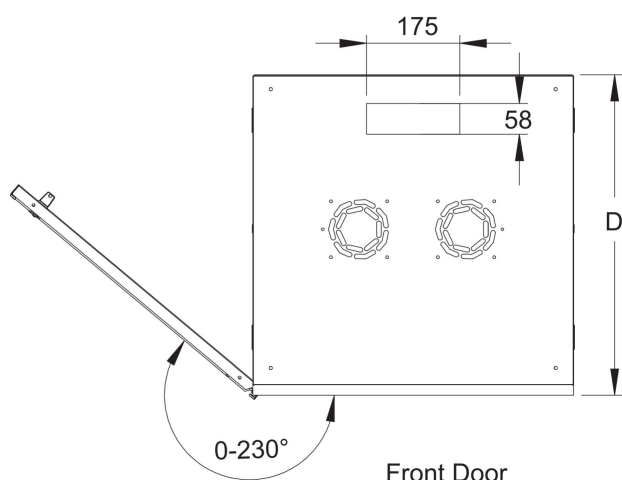


Front Door
Opening Angle

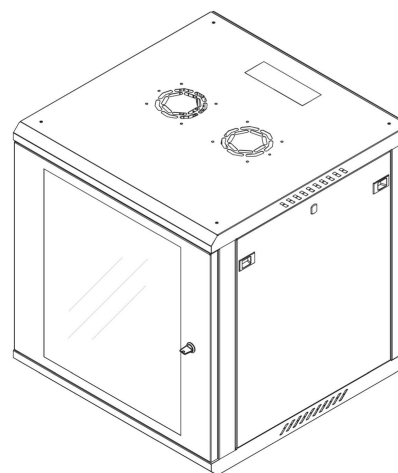

Isometric view

Габаритные чертежи: Сетевой шкаф настенный S-RACK, Ш=600 В=779 Г=450, 19", 15U

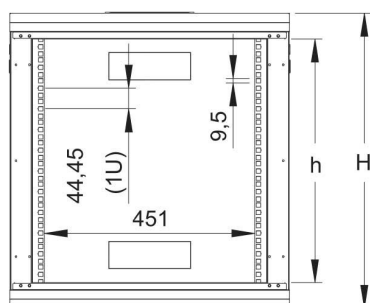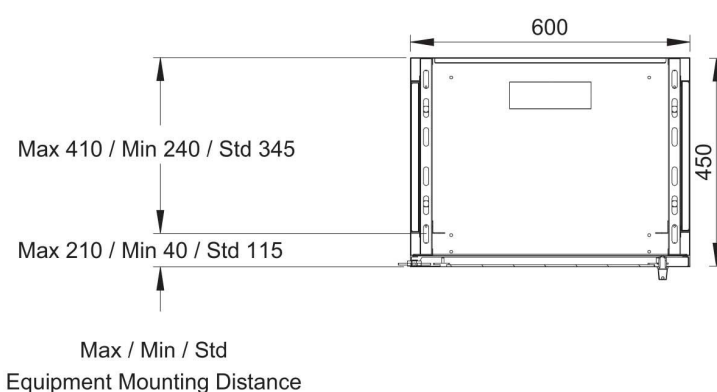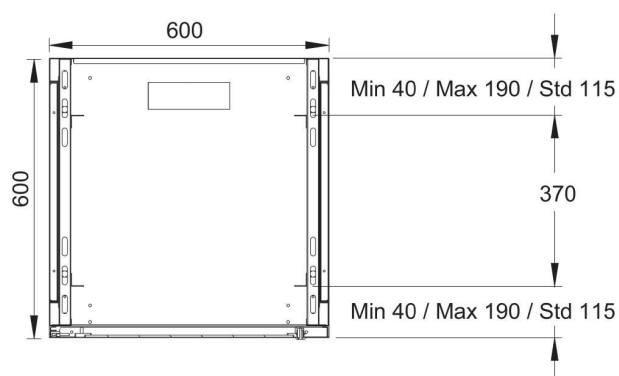

Dimensions in
Width and Height

U Height	Size D	h	H	Ah
4U	450/600	178	290	251
6U	450/600	267	379	340
9U	450/600	400	512	473
12U	450/600	533	645	606
15U	450/600	667	779	740
18U	450/600	800	912	873

Габаритные чертежи: Сетевой шкаф настенный S-RACK, Ш=600 В=779 Г=450, 19", 15U

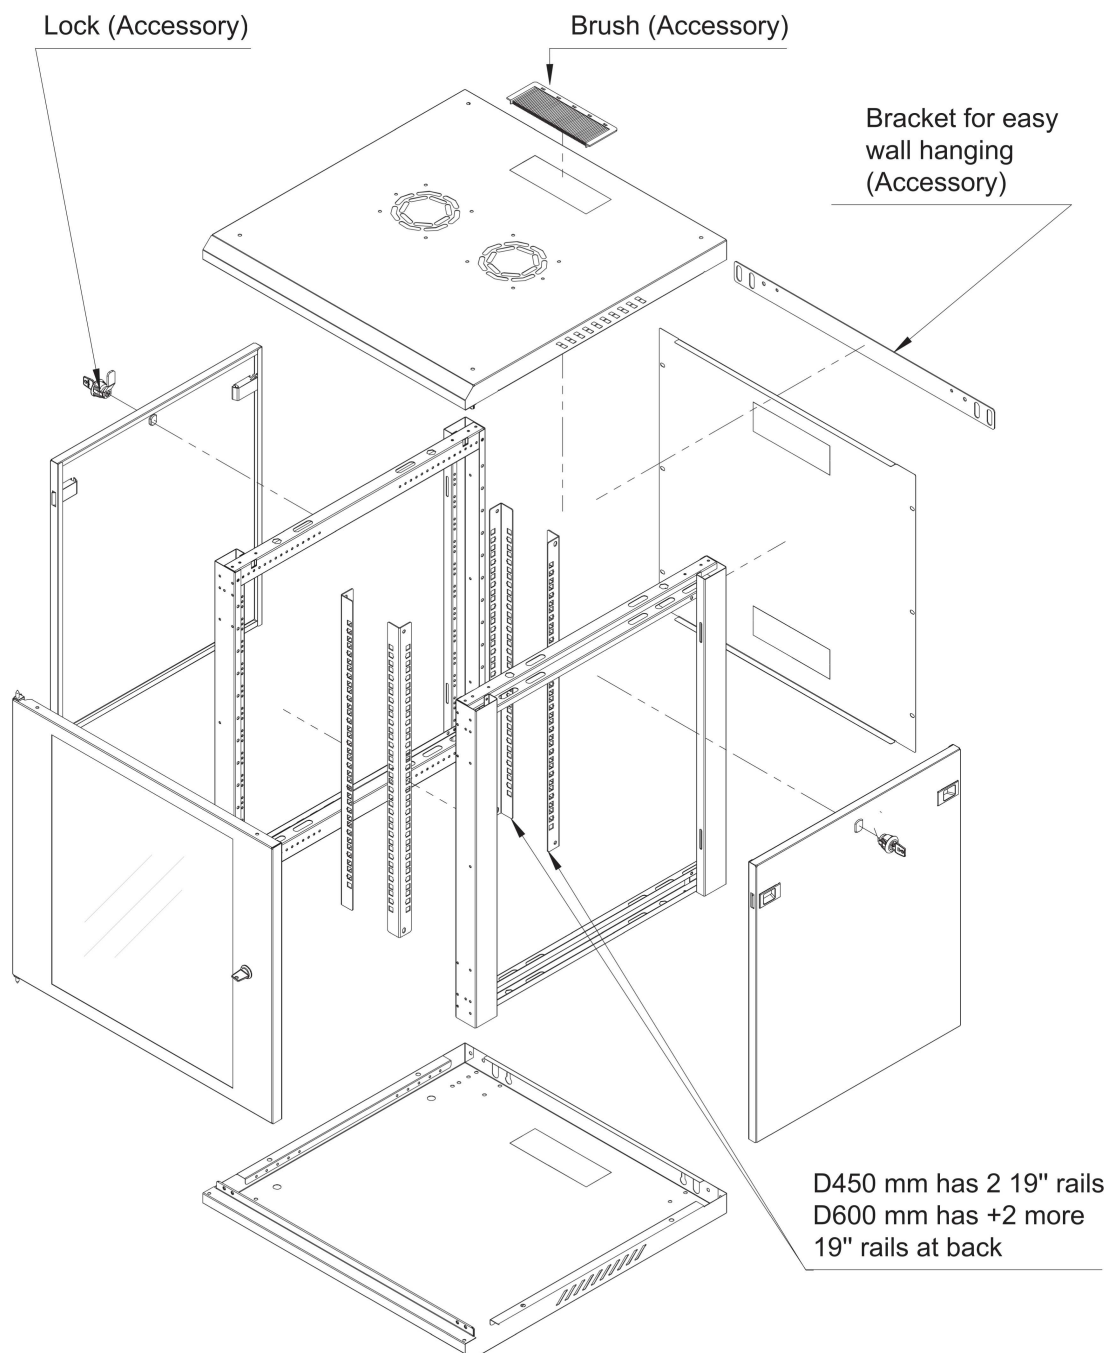


Таблица артикулов

ОПИСАНИЕ	Номер заказа
Сетевой шкаф настенный S-RACK, Ш=600 В=779 Г=450, 19", 15U RAL9005 черный, рейки 19", 2 впереди	DTWH156045
опциональные принадлежности	
Вентиляционный блок, верхний, 2 вентилятор, для шкафа S-RACK, аналоговый термостат, RAL9005 Монтаж снаружи шкафа, для отдельно стоящих и настенных шкафов	DTLTR02A-B
Вентиляционный блок, верхний, 1 вентилятор, для шкафа S-RACK, аналоговый термостат, RAL9005 Монтаж снаружи шкафа, для отдельно стоящих и настенных шкафов	DTLTR01A-B
19" К-т профильных реек, 15U для наст. шкафа S-RACK DTWG и DTWH, 1 уп. = 2 шт. (слева/справа)	DTWGPROF15
Стационарная полка 19", 1U, нагрузка до 30 кг, Г=300 мм, низкопрофильная 2-точечное крепление, RAL9005	DTFT1300-B
К-т роликов (2 с тормозом, 2 без тормоза) для S-RACK DTWG и DTWH, макс. нагрузка = 80 кг	DTZR0006
Замок и ключ для боковой панели S-RACK DTWG и DTWH 1 Set = 2pcs.	DTZLOCK06
Кронштейн для крепления на стену наст. шкафов DTWG и DTWH 2 запрессовочные гайки с покрытием, RAL9005 черный	DTZBRACK-B
Щеточная вставка для крыши/пола настенного шкафа S-RACK DTWG и DTWH, 60x176 мм	DTZBRUSH04
коммут.панель, 19", незаполн., на 24 мод. (SFA)(SFB), 1U, RAL9005 Black, single-piece design, patchcord lock down	HSER0240SP
Кабельная панель 19", 1U, 5 металлических колец, 63 мм, RAL9005	DTBC105R-B
Монтажный комплект 19" M6, винты 20 шт., гайки 20 шт., шайбы 20 шт.	DTSRA020
Выкл.24xRJ45 10/100/1000, бесшумн., без вентил., внутр.ист.пит. Metal-Chassis, 19"	QLGSW2457
19" удлинитель, 9хрозеток, 1 юнит, 2м кабель, RAL7035	IU070114
19" удлинитель, 7хрозеток+ОПН, 1.25юнита, 2м кабель, RAL7035 2m-connector cable, RAL7035	IU070113
19" PDU, 9x Schuko, switch, 1U, 2m-cable, Black, ALU ALU Profil	Q7070114-A
19" PDU, 7x Schuko, Switch, Overvoltage protection, 1U 2m-cable, Black, ALU	Q7070113-A