


Технический паспорт изделия : IL423539-A

Zählerverteiler Einsatz 5-39G, 10 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

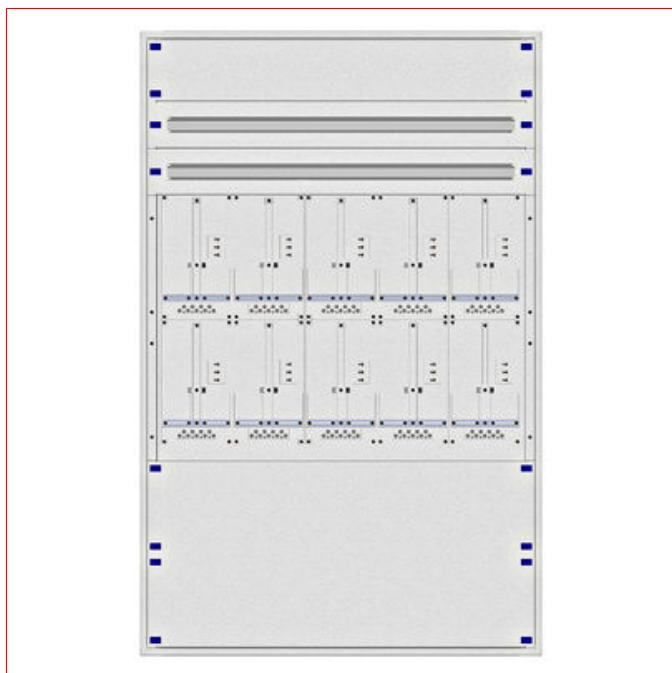

Технические данные

Ширина нетто (мм)	1.140,00
Высота нетто (мм)	1.795,00
Глубина нетто (мм)	150,00
EAN-код	9004840967142
Тип	Распределительное устройство для счетного прибора, монтаж впотай
Федеральная земля	Тироль
Вставные компоненты	Листовая сталь для передней панели
Цвет	RAL 7035
Ширина счетчика	5
МЕ (1 единица 44,45 мм)	39
Ряды счетчиков	2
Места расположения счетчиков	10
Ряды после счетчиков	2
Лицевая панель	Листовая сталь
Основное описание	Вставка
Ширина модуля	114

Таблица артикулов

ОПИСАНИЕ	ВЕС МЕДИ (кг/км)	Номер заказа
Zählerverteiler Einsatz 5-39G, 10 Zählerplätze, Tirol Frontblende Stahlblech, komplett		IL423539-A
опциональные принадлежности		
Комплект заземления 300mm/ Yf 6mm ²		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824