


Технический паспорт изделия : IL433442-A

Zählerverteiler Einsatz 4-42M, 12 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

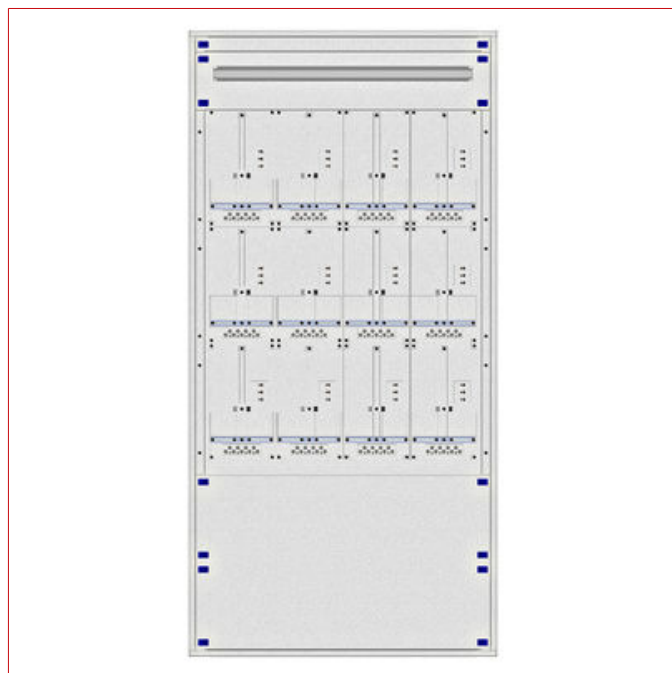

Технические данные

Ширина нетто (мм)	940,00
Высота нетто (мм)	1.935,00
Глубина нетто (мм)	150,00
EAN-код	9004840967210
Тип	Распределительное устройство для счетного прибора, монтаж впотай
Федеральная земля	Тироль
Вставные компоненты	Листовая сталь для передней панели
Цвет	RAL 7035
Ширина счетчика	4
МЕ (1 единица 44,45 мм)	42
Ряды счетчиков	3
Места расположения счетчиков	12
Ряды после счетчиков	1
Лицевая панель	Листовая сталь
Основное описание	Вставка
Ширина модуля	45

Таблица артикулов

ОПИСАНИЕ	ВЕС МЕДИ (кг/км)	Номер заказа
Zählerverteiler Einsatz 4-42M, 12 Zählerplätze, Tirol Frontblende Stahlblech, komplett		IL433442-A
опциональные принадлежности		
Комплект заземления 300mm/ Yf 6mm ²		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824