


Технический паспорт изделия : HLP2SLL00F

Оптовол. Патч-к Duplex LC/UPC - LC/UPC, 50/125 мкм OM5, LSOH

зеленая лиметта, 0,5 м



SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Технические данные

Ширина нетто (мм)	150,00
Высота нетто (мм)	200,00
Вес нетто (кг)	0,04
Норма	IEC 61300-3-4 / IEC 61300-3-6
Connector standard	IEC 61754
Конфигурация штекера	LC/LC
Длина (м) (м)	0,50
Волокно	50/125 OM5 Multimode
Оболочка кабеля	LS0H
Цвет	lime green
Insertion loss typical (дБ)	$\leq 0,25$
Return loss typical (дБ)	≥ 30
мин. температура окружающей среды (°C)	-20
макс. температура окружающей среды (°C)	60

Габаритные чертежи: Оптовол. Патч-к Duplex LC/UPC - LC/UPC, 50/125 мкм OM5, LS0H

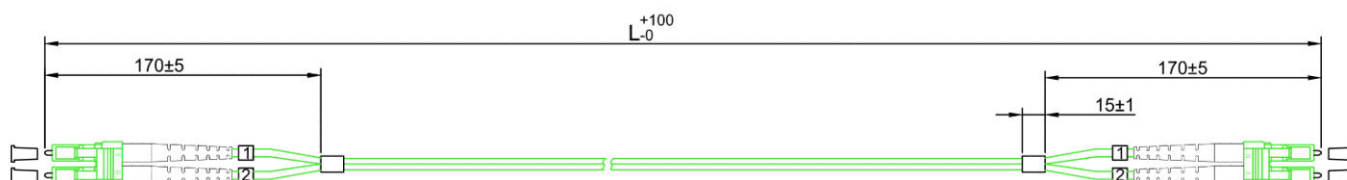

ОПИСАНИЕ

Номер заказа

Оптовол. Патч-к Duplex LC/UPC - LC/UPC, 50/125 мкм OM5, LSOH
зеленая лиметта, 0,5 м

HLP2SLL00F