

Технический паспорт изделия : IU070131--

19"PDU для ИБП, 8хUTE крас., 2м-каб.С14, 10А пл.вст., 1U, RAL7035



SCHRACK-Info

The PDU is especially designed for UPS installed in 19"-serverenclosures and/or datacenters.

The IEC C14 connector is connected to the UPS and offers 8 red-marked Shuko sockets for connection to operation-critical devices, like Servers, Routers, Ethernet-Switches, etc.

Included is a changeable 10A-Fuse for protection of the C14 connector on the cable which is approved for 10A according to the standard IEC 60320.

TECHNICAL DATA

- 8 earth contact - sockets red with fuse 10 A
- Sockets: DIN 49 440, examined: VDE0620-1; 2-pole with earthing contact; 16A/3600W, AC250V, IP20, colour red, 35° turned;
- Connection: non rewirable, Endcaps riveted, inside wiring without euro terminal Power cable 2,0m H05VV-F 3G1,5mm² with IEC C14 plug
- Profile: 1U, ALU, anodized
- Plastic material: RAL7035, PA6 GF 30 V1, Glow wire resistant up to 850° C
- Holding flanges : Steel sheet. For fixing in 4 positions each 90°
- Fuse: Fuse 10A, exchangeable
- Packing: polybag
- Extent of delivery:
 - 1 x Socket outlet
 - 2 x 19" mounting metal flanges (Loose)

Технические данные

Ширина нетто (мм)	483,00
Высота нетто (мм)	44,00
Глубина нетто (мм)	44,00
Вес нетто (кг)	0,84
мин. температура окружающей среды (°C)	5
макс. температура окружающей среды (°C)	45
Цвет	RAL 7035 (светло-серый)

Габаритные чертежи: 19" PDU для ИБП, 8хUTE крас., 2м-каб. C14, 10A пл.вст., 1U, RAL7035

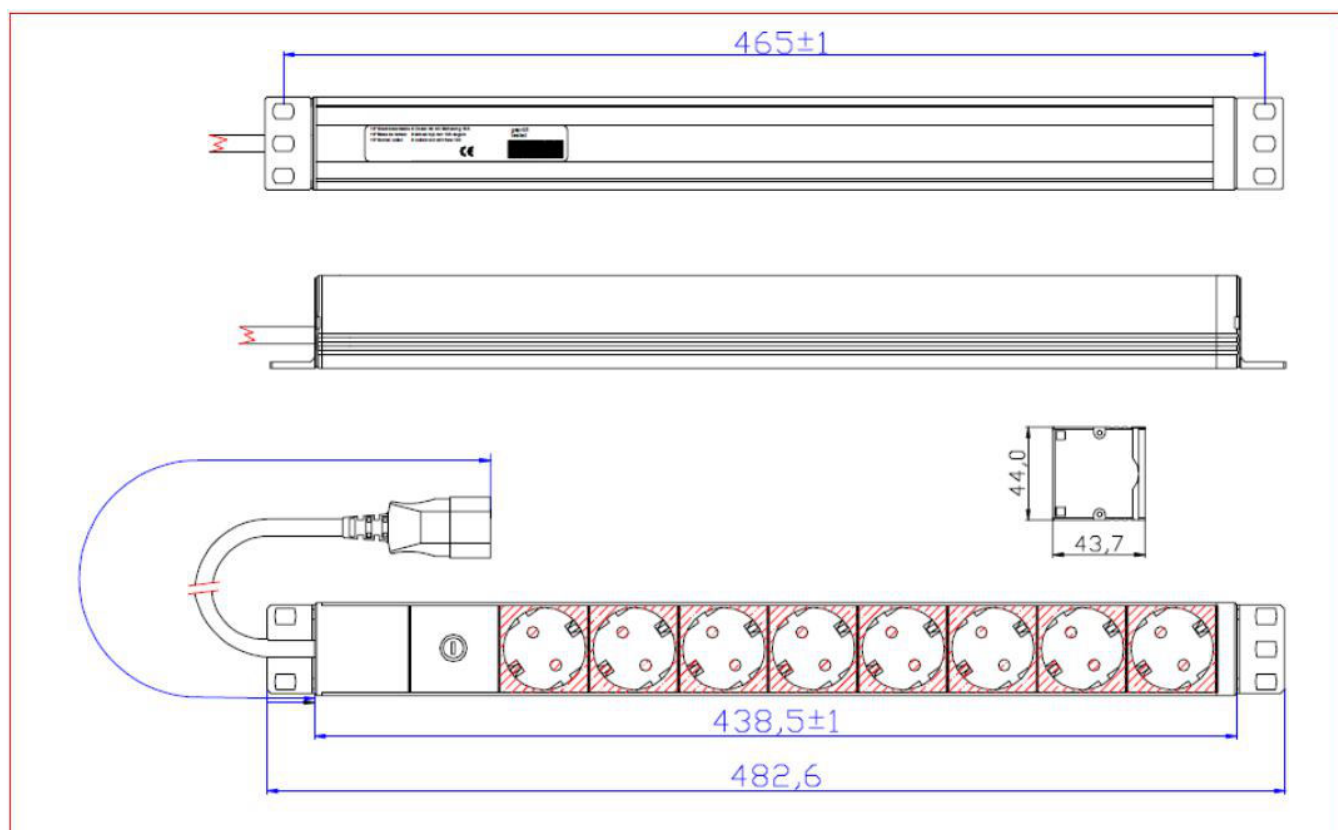


Таблица артикулов

ОПИСАНИЕ	Номер заказа
19" PDU для ИБП, 8xUTE крас., 2м-каб. C 14, 10A пл.вст., 1U, RAL7035	IU070131
опциональные принадлежности	
Держ.блоков распредел.пит.для шкафов DS и DSZ шир. 800мм, 1U 1 пара = 2 шт., монтируется снаружи вертикальной рейки 19", материал для сборки входит в комплектацию	DSPDU010
Держ.блоков распредел.пит.для шкафов DSS шир. 600 и 800мм, 1U 1 пара = 2 шт., монтируется в каркасную стойку, материал для сборки входит в комплектацию	DSSPDU010
Держ.блоков распредел.пит.для шкафов DSS шир. 600 и 800мм, 2U 1 пара = 2 шт., монтируется в каркасную стойку, материал для сборки входит в комплектацию	DSSPDU021
Шнур питания с вилкой Schuko - C 13, черный, 1,8м	Q7130121
Шнур питания с вилкой Schuko - C 13, черный, 3м	Q7130059
Шнур питания Schuko - C 13, 90°, черный, 5м	Q7170732
Кабель питания Euro - Euro8, черный, 1.8м	Q7172506
Кабель питания - C5 (треугольник), черный, 1.8м	Q7172902